


10K SHORT-RISE SCISSOR LIFT

SRM10

With a brake and express tire service specialty, this low-rise 10,000 lbs. lift has a surprisingly small footprint for all its capabilities.

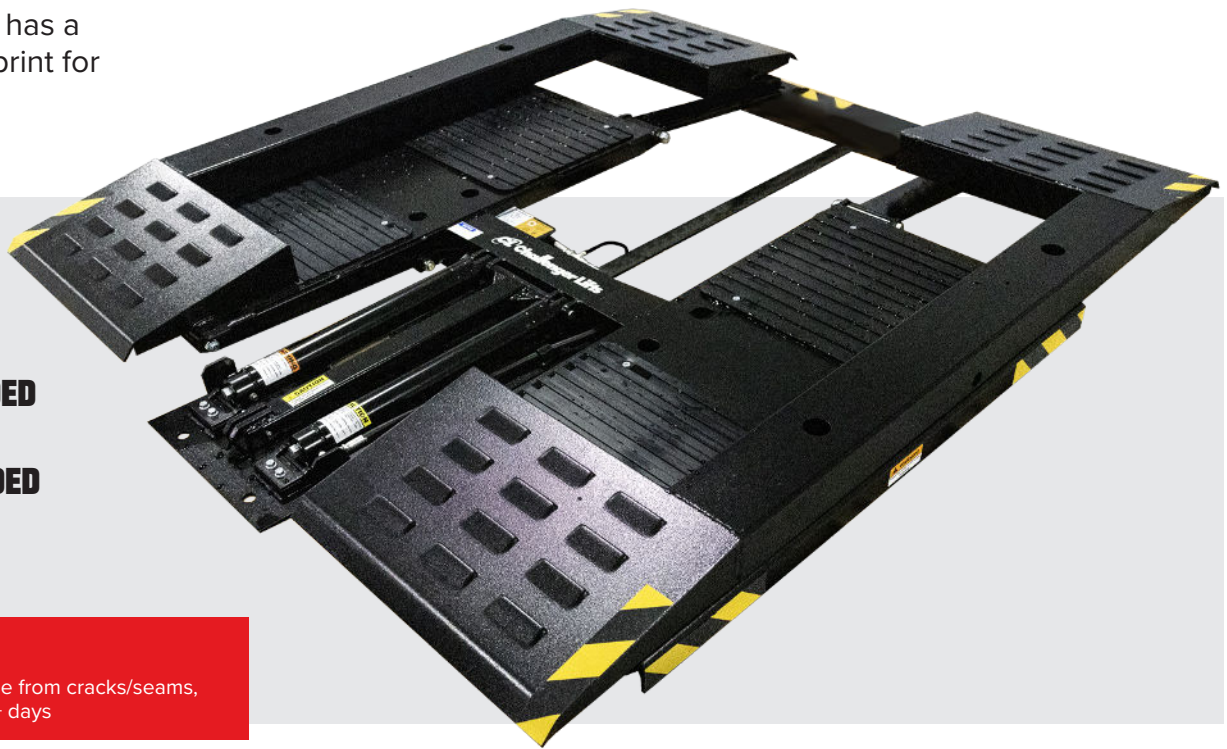

REQUIREMENTS

- 10' MINIMUM**
- 12' RECOMMENDED**
- 24' RECOMMENDED**
- 115V, 60HZ, 1PH**

CONCRETE
4" thick, reinforced, free from cracks/seams, 3500+ psi & cured 28+ days

SPECIFICATIONS

MODEL NUMBER	SRM10
Lifting Capacity	10,000 lbs.
Rise Height (A)	22"
Low Adapter Position (B)	4¾"
High Adapter Position (C)	6¾"
Overall Width (D)	85" (+2½" for handle)
Outside Width of Platforms (E)	72"
Width Between Platforms (F)	23"
Overall Platform Length (G)	50"
Overall Ramp & Platform Length (H)	82½"
Overall Length (I)	92⅞"
Lowered Height	4¼"
Locking Bar Heights	13¾", 18¼", 21¼"
Rearward Movement	13¼"
Standard Motor/Voltage	1HP, 115v, 60Hz, 1Ph
ALI® Certified	<input checked="" type="checkbox"/>

SERVICE BAY LAYOUT

