

# 14K SCISSOR ALIGNMENT SX14

Easy to operate and load, this 14,000 lbs. lift **comes standard with productivity upgrades like LED lighting, pneumatic single-point locking rear slip plates, and a photocell to ensure runway synchronization.** Dual hydraulic cylinders provide smooth operation. Optional extended ramps are available to accommodate low-clearance vehicles.

Flush and Surface-mount options are available.

## REQUIREMENTS


|                                                                                    |                           |
|------------------------------------------------------------------------------------|---------------------------|
|    | <b>12' MINIMUM</b>        |
|    | <b>14' RECOMMENDED</b>    |
|    | <b>28' RECOMMENDED</b>    |
|   | <b>208-230V, 1PH, 30A</b> |
|  | <b>90-120 PSI</b>         |



## SPECIFICATIONS

| MODEL NUMBER                | SX14                     | SX14-FM     | SX14-ER        |
|-----------------------------|--------------------------|-------------|----------------|
| Description                 | Standard                 | Flush Mount | Extended Ramps |
| Lifting Capacity            | 14,000 lbs.              |             |                |
| Overall Width (A)           | 91¼"                     |             |                |
| Overall Length (B)          | 265"                     | 219"        | 283"           |
| Width Between Platforms (C) | 40"                      |             |                |
| Platform Width (D)          | 25½"                     |             |                |
| Distance to Controls (E)    | 156"                     |             |                |
| Rise Height (F)             | 77"                      | 66½"        | 77"            |
| Lowered Height (G)          | 10½"                     | NA          | 10½"           |
| Max Wheelbase (H)           | 183"                     |             |                |
| Wheel Alignment Max. (J)    | 176"                     |             |                |
| Wheel Alignment Min. (K)    | 70¾"                     |             |                |
| Platform Length             | 197½"                    |             |                |
| Ramp Length                 | 62¾"                     |             | 80¾"           |
| Standard Motor/Voltage      | 3HP, 208-240V, 60Hz, 1Ph |             |                |
| Rise Time                   | 75s                      |             |                |
| Max. Load per Platform      | 7,000 lbs.               |             |                |
| ALI Certified               | ☑                        |             |                |

## SERVICE BAY LAYOUT

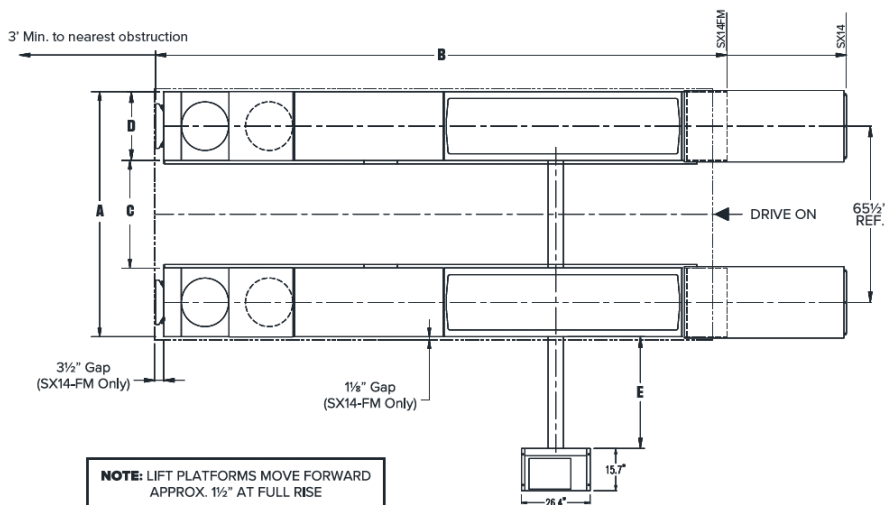

## CONCRETE SPECS

4" thick, reinforced, free from cracks & seams, rated at 3500+ psi & cured minimum of 28 days

